


IZOBEST STRAIGHT BLOCK

INTERLOCKING EXPANDED POLYSTYRENE INSULATED
CONCRETE FORM BLOCK

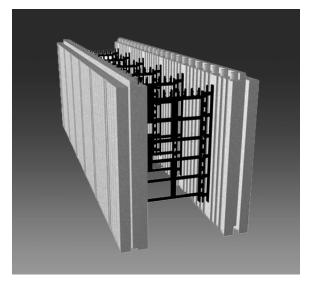

PHYSICAL PROPERTIES

HD expanded polystyrene (type 2)

Thermal Resistance (ASTM C518 C177) Thiskness of 25 mm (1")	RSI-0.73 R-4.17	
Thickness of 25 mm (1")		
Water Vapour Permeability	130 ng/Pa·s·m²	
(ASTM E96)	2.25 perm	
Thickness of 25 mm (1")	2.25 pcm	
Compressive Strength	140 kPa*	
(ASTM D1621)	20.31 lbs/in²	
Thickness of 38 mm (1 1/2")	20.31 103/111	
Flexural Strength	300 kPa	
(ASTM C518 C203)	43.71 lbs/in²	
Thickness of 38 mm (1 1/2")		
Water Absorption		
(ASTM D2842)	3%	
Thickness of 38 mm (1 1/2")		
Density	24.02 kg/m³	
(ASTM D1621)	1.5 lbs/ft³	
Limiting Oxygen Index	24%	
(ULC S-701) % minimum	24%	
Dimensional Stability (ASTM D2126) % max. of linear change	1.5%	

ADVANTAGES

- The thermal value of the expanded polystyrene is 100% guaranteed.
- · Shiplapped on four edges.
- · IZOBEST particular interlocking system.
- · Invisible system attachment, high resistance to low temperature.
- · Durable concrete building.
- Airtight
- · Soundproofing (59 STC).
- · Minimum of R-30.
- · Without thermal bridge.
- Energy saving from 30% to 50%.
- · Meets Novoclimat requirements.

CERTIFICATIONS





IZOBEST - STRAIGHT BLOCK					
Material	Panel: Moulded IZOLON expanded polystyrene (EPS) type HD.				
	Spacer: High quality virgin Copolymer.				
Net Coverage	0.50 m ² 5.33 ft ²				
Wall Thickness	66.68 mm (2 %") on 2 sides				
Block color	Grey				
Weight per block	3.18 kg 7 lbs				
Spacer	203 mm (8") on center				

Continued on back

0511202


IZOBEST

STRAIGHT BLOCK

INTERLOCKING EXPANDED POLYSTYRENE INSULATED CONCRETE FORM BLOCK

DIMENSIONS

IZOBEST - STRAIGHT BLOCK

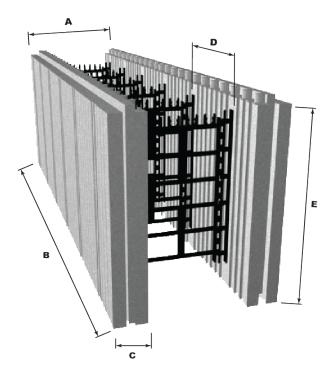

STRAIGHT BLOCK

	A	В	С	D	E
4"	91⁄4"	48"	25%"	8"	16"
6"	11¼"	48"	25%"	8"	16"
8"	13¼"	48"	25/8"	8"	16"
10"	15¼"	48"	25/8"	8"	16"
12"	17¼"	48"	25%"	8"	16"

