


# FRANSYL

## IZOROK SYSTEM

BALLASTED ROOFING SYSTEM

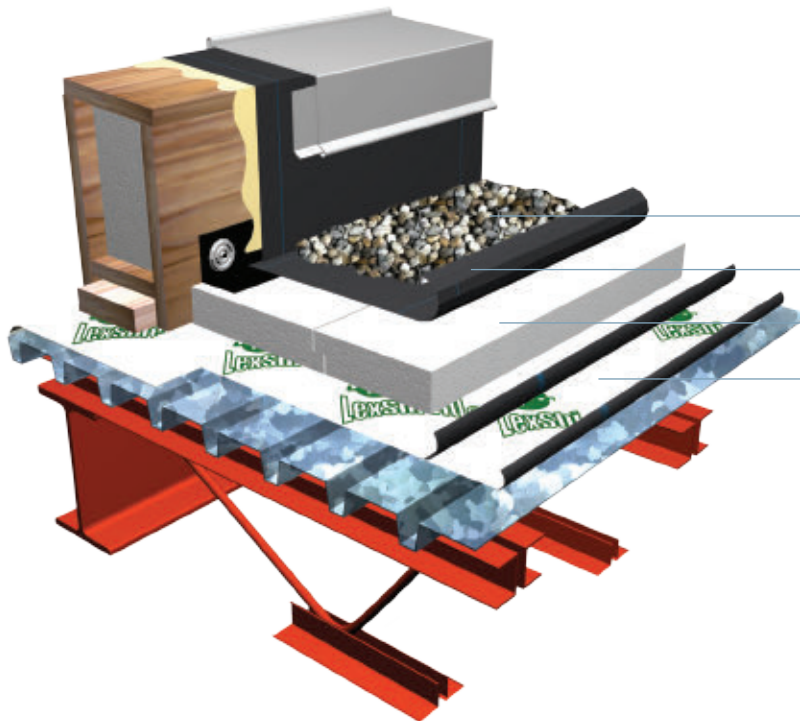

- Ballast
- EPDM membrane
- Fransyl Izolon insulation
- Lexcor Lexshield vapour barrier

See back page for system components selection

### ADVANTAGES

- 🏠 Fransyl materials and workmanship warranty available with this system<sup>1</sup>
- 🏠 Insulation thermal value warranty of minimum 35 years
- 🏠 No fire concerns
- 🏠 No asphalt adhesive
- 🏠 Odour free
- 🏠 Fast and easy installation
- 🏠 Possible insulation reuse when re-roofing
- 🏠 Achieves Novoclimat insulation standards
- 🏠 Membrane recyclability
- 🏠 Contributes to LEED score
  - Fransyl Izolon insulation recyclability
  - Percentage of recycled materials in Fransyl's Izolon insulation
  - Local manufacturing of Fransyl's Izolon insulation


### ACKNOWLEDGMENT\*



\*according to selected components

<sup>1</sup> Some conditions apply

## IZOROK SYSTEM

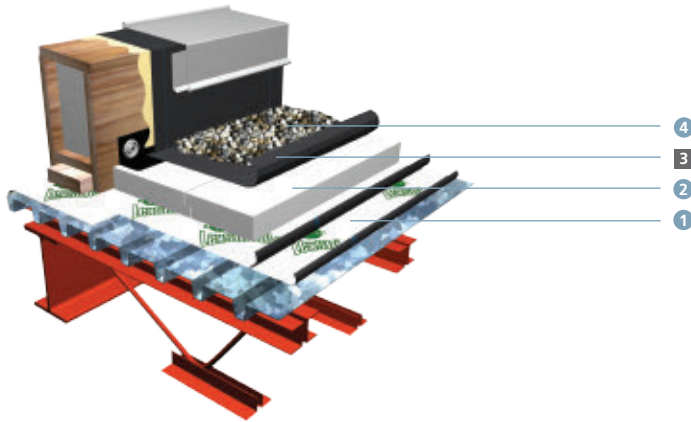

Date: \_\_\_\_\_

Project's name: \_\_\_\_\_

Address: \_\_\_\_\_

Deck:  wood  concrete  steel  other: \_\_\_\_\_

Building: Area(roof): \_\_\_\_\_ ft<sup>2</sup>  
 Height / number of stage(s): \_\_\_\_\_

### IZOROK SYSTEM MATERIAL OPTION

Composition down to up	Attachment/Adhesion	Material
Vapour barrier	<input type="checkbox"/> Lexcor Permte adhesive <input type="checkbox"/> Lexcor Multigrip Adhesive and primer	① <input type="checkbox"/> Lexshield <input type="checkbox"/> Permte Stick <input type="checkbox"/> Permte <input type="checkbox"/> Permte Ultra-R
<i>Optional: Support panel</i> According to ULC requirements	N/A	<input type="checkbox"/> Fiberboard panel 4' x 8' ___ in <input type="checkbox"/> Gypsum board 4' x 8' ___ in
Flat insulation	N/A	② <input type="checkbox"/> Fransyl Izolon insulation type HR or THR 4' x 8' ___ in
<i>Optional: Slope insulation</i>	N/A	<input type="checkbox"/> Fransyl Bizolon insulation ___ in
Cap sheet	③ <input type="checkbox"/> Ballast (12 to 15 lbs/ft <sup>2</sup> )	④ <input type="checkbox"/> EPDM membrane

Any system must be pre-approved by Fransyl Ltd. Any deviation from this system without Fransyl's authorization will automatically void the warranty in force for the system.  
 Note: Fransyl reserves the right to alter without notice the composition and conditions of use of systems and materials.

To obtain a quote for the composition of the system chosen above and the information below, send this document at [infodevis@fransyl.com](mailto:infodevis@fransyl.com)

Load weight  by ft<sup>2</sup>      R-Value       Budget price  by ft<sup>2</sup>      Note(s)