


FRANSYL IZOFLÛTE SYSTEM

FLUTE STEEL DECK ROOFING SYSTEM

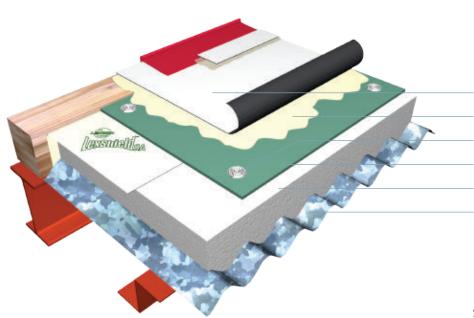

Single ply membrane
Water based adhesive
Mechanical fasteners
Support panel
Fransyl Izoflûte insulation
Flute steel deck

See back page for system components selection

ADVANTAGES

- Materials and workmanship warranty available with this system¹
- Insulation thermal value warranty of minimum 35 years
- No asphalt adhesive
- Odor free
- Flameless
- **Easy installation**
- Load weight reduction
- Achieves Novoclimat insulation levels
- Contributes to LEED score
 - Membrane reflectivity
 - Fransyl Izoflûte insulation recyclability
 - Percentage of recycled materials in Fransyl's Izoflûte insulation
 - Local manufacturing of Fransyl's Izoflûte insulation

¹ Some conditions apply

ACKNOWLEDGMENT*










*according to selected components

² White EPDM or TPO

IZOFLÛTE SYSTEM

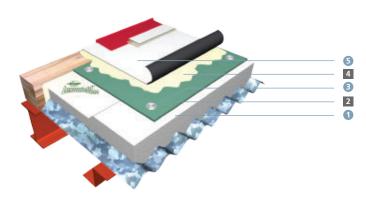

Date:
Project's name:
Address:
Deck: wood □ concrete □ steel □ other: □
Building: Area(roof): ft²
Height / number of stage(s):

IZOFLÛTE SYSTEM MATERIAL OPTION			
Composition down to up	Attachment/Adhesion	Material	
Flat insulation	N/A	1 Fransyl Izoflûte insulation in	
Support panel	2 Mechanical fasteners (screws and plates)	Siliconed and primed gypsum in Siliconed gypsum po HD Wood fibre coated panel in Composite panel in Lexboard in	
Cap sheet	Water based adhesive ☐ Solvent based adhesive	5 ☐ TPO (45 or 60) ☐ Fleece backed TPO (45 or 60) ☐ EPDM (45 or 60) ☐ Fleece backed EPDM (45 or 60)	

Any system must be pre-approved by Fransyl Ltd. Any deviation from this system without Fransyl's authorization will automatically void the warranty in force for the system. Note: Fransyl reserves the right to alter witout notice the composition and conditions of use of systems and materials.

To obtain a quote for the co	emposition of the syste	m chosen above and the info	ormation below, send this document at infodevis@fransyl.com
Load weight by ft ²	R-Value	Budget price by ft ²	Note(s)



ROOFING SYSTEMS