


# FRANSYL

## IZOBOND SYSTEM

ROOFING SYSTEM WITH INDUCTION ATTACHMENT

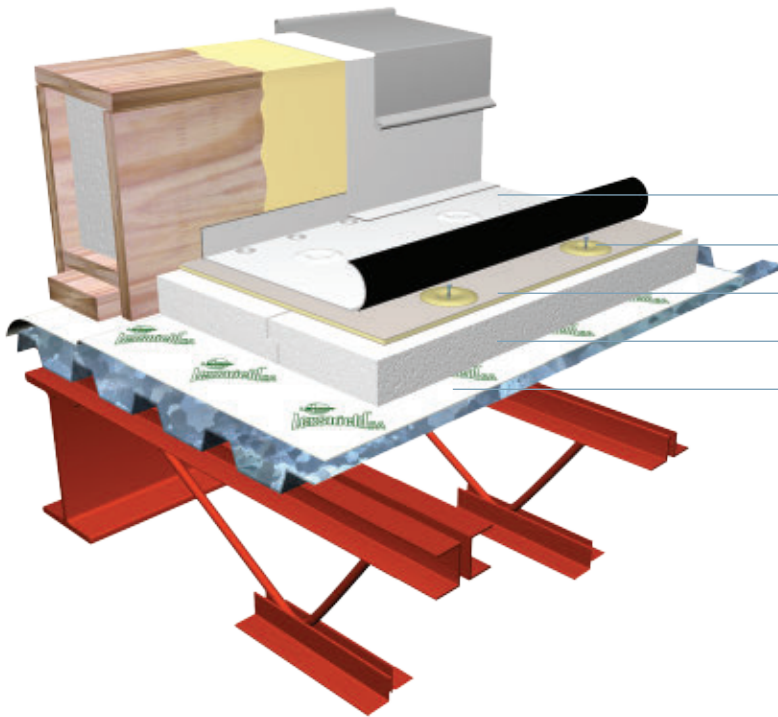

- Lexcan White TPO HI-TUFF Membrane
- Lexcor Lexgrip induction Screw and Plates
- Lexcor Lexboard Recover Board
- Fransyl Izolon Insulation
- Lexcor Lexshield self-adhesive vapour barrier

See back page for system components selection

### ADVANTAGES

- Fransyl materials and workmanship warranty available with this system<sup>1</sup>
- Insulation thermal value warranty of minimum 35 years
- Flameless
- No asphalt adhesive
- Odour free
- Fast and easy installation
- Lightweight assembly
- Achieves Novoclimat insulation standards
- Contributes to LEED score
  - Membrane reflectivity<sup>2</sup>
  - Fransyl Izolon insulation recyclability
  - Percentage of recycled materials in Fransyl's Izolon insulation
  - Local manufacturing of Fransyl's Izolon insulation
- Really esthetic job

### ACKNOWLEDGMENT\*




\*according to selected components

<sup>1</sup> Some conditions apply

<sup>2</sup> White TPO

## IZOBOND SYSTEM

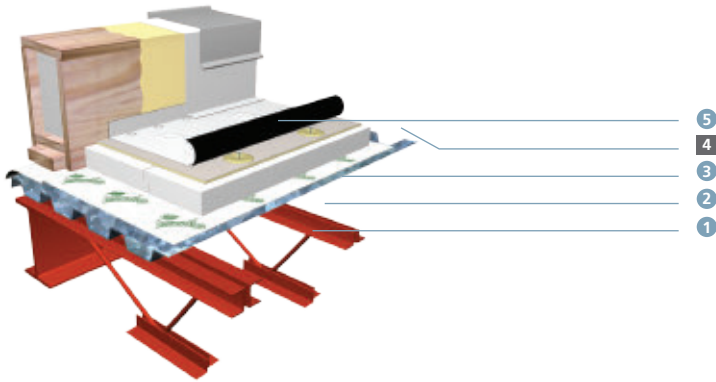

Date: \_\_\_\_\_  
 Project's name: \_\_\_\_\_  
 Address: \_\_\_\_\_  
 Deck:  wood  concrete  steel  other: \_\_\_\_\_  
 Building: Area(roof): \_\_\_\_\_ ft<sup>2</sup>  
 Height / number of stage(s): \_\_\_\_\_

### IZOBOND SYSTEM MATERIAL OPTION

Composition down to up	Attachment/Adh�sion	Mat�riaux
Pare-vapeur	<input type="checkbox"/> Lexcor Permaste adhesive <input type="checkbox"/> Lexcor Multigrip adhesive and primer	1 <input type="checkbox"/> Lexshield <input type="checkbox"/> Permaste Stick <input type="checkbox"/> Permaste
Flat Insulation	N/A	2 <input type="checkbox"/> Fransyl Izolon Insulation type THR 4' x 8' ____ po
<i>Optional: Slope insulation</i>	N/A	<input type="checkbox"/> Fransyl Bizolon insulation ____ po
Support panel	4 <input type="checkbox"/> Lexcor Lexgrip Screws and induction Plates*	3 <input type="checkbox"/> 1/4" Panel Lexcord Lexboard
Cap Sheet	(Induction Attachment)	5 <input type="checkbox"/> Hi-Tuff TPO 60 mil Membrane <input type="checkbox"/> Hi-Pro PVC 60 mil Membrane or more

\* Make sure to use the plate corresponding to the membrane finish used.

Any system must be pre-approved by Fransyl Ltd. Any deviation from this system without Fransyl's authorization will automatically void the warranty in force for the system.  
 Note: Fransyl reserves the right to alter without notice the composition and conditions of use of systems and materials.

To obtain a quote for the composition of the system chosen above and the information below, send this document at [infodevis@fransyl.com](mailto:infodevis@fransyl.com)

Load weight  by ft<sup>2</sup>    R-Value     Budget price  by ft<sup>2</sup>    Note(s)