


FRANSYL

ENDURO SYSTEM

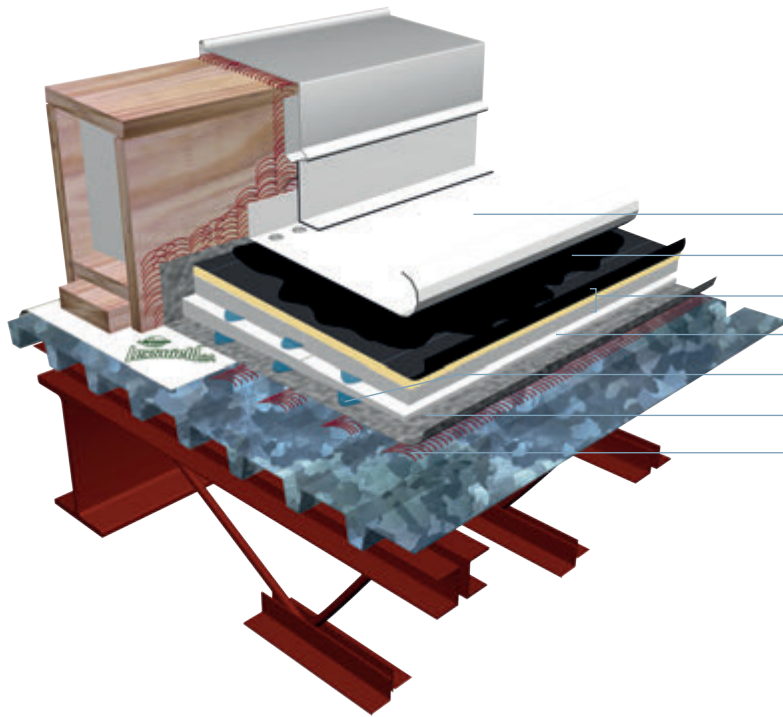

- Fibertite Fleeceback Membrane
- FiberTite FTR 390 Coating
- Fransyl Polybase R+ S
- Fransyl Bizolon
- Lexcor Lexphalt LG Adhesive
- Lexcor Permaste Stick SA Vapour Barrier
- Lexcor Ultrastick Adhesive and Primer


See back page for system components selection

ADVANTAGES

- 🏠 Material and workmanship warranty up to 30 years offer with this system¹
- 🏠 Insulation thermal value warranty of minimum 35 years
- 🏠 Take off "a two-layer system" a dual membrane system
- 🏠 Polybase R+ S monolithic panel
- 🏠 Meets or exceeds requested R-Value
- 🏠 No temporary sealant required after Polybase R+S panel application
- 🏠 Increases contractor productivity
- 🏠 Achieves Novoclimat insulation levels
- 🏠 Flameless, no asphalt adhesive, odour free
- 🏠 Lightweight assembly

¹ Some conditions apply

ENDURO SYSTEM

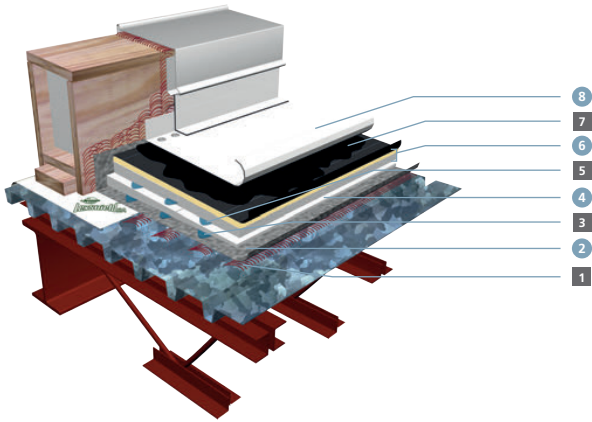

Date: _____

Project.s name: _____

Address: _____

Deck: wood concrete steel other: _____

Building: Area (roof): _____ ft²

Height / number of stages: _____

ENDURO SYSTEM MATERIAL OPTIONS		
Composition down to up	Attachment/Adhesion	Material
Vapour barrier	1 <input type="checkbox"/> Lexcor Multigrip adhesive and primer <input type="checkbox"/> Lexcor Ultrastick adhesive and primer	2 <input type="checkbox"/> Lexcor Permaste Stick
<i>Optionnal:</i> Slope insulation	3 <input type="checkbox"/> Lexcor Adphalt adhesive <input type="checkbox"/> Lexcor Lexphalt LG adhesive <input type="checkbox"/> Lexcor Insultac II adhesive	4 <input type="checkbox"/> Fransyl Bizolon _____ in <input type="checkbox"/> Lexcor Isolex _____ in
Underlayment / support panel / flat insulation ²	5 <input type="checkbox"/> Lexcor Adphalt adhesive <input type="checkbox"/> Lexcor Lexphalt LG adhesive <input type="checkbox"/> Lexcor Insultac II adhesive	6 <input type="checkbox"/> Fransyl Polybase R+ S _____ in <input type="checkbox"/> Lexcor Lextrio R+ S _____ in
Cap sheet	7 <input type="checkbox"/> FiberTite FTR 390 Coating	8 <input type="checkbox"/> FiberTite Fleeceback

² For any additional slope or counterslope insulation, contact your Fransyl representative to obtain the appropriate option for your project.

Any modification to the system, including adhesives, primers and accessories, must be approved by Fransyl Ltd. Any modification without Fransyl's authorization will automatically void the warranty.

Note: Fransyl Ltd reserves the right to alter, without notice, the composition and conditions of use of systems and materials.

To obtain a quote for the composition of the system chosen above and the information below, send this document at infodevis@fransyl.com

Load Weight by ft² R-Value Budget Price by ft² Note(s)

