

# FLASH-TITE SURE-FLOW

## RETROFIT VANDALPROOF VENT CAPS

### DESCRIPTION & USE

- Quick and easy way to prevent roof vent stacks from being accidentally or intentionally clogged by vandals.

**Note:** SURE-FLOW RETROFIT VANDALPROOF VENT CAPS are meant to be attached directly to exposed vent pipes that have been flashed to the roof with a single component low rise flashing. For vent pipes that have been flashed with a two piece flashing featuring a separate cap (i.e.: the FLASH-TITE STANDARD VENT STACK COVER), you must use the non-retrofit style of VANDALPROOF VENT STACK CAPS. Refer to VANDALPROOF VENT STACK COVERS product data sheet for more information on this product.

### FEATURES & BENEFITS

**Vandalproof Design** - Prevents objects and debris from being jammed in the vent pipe.

**Heavy Duty Construction** - Caps are constructed of heavy gauge metal to resist abuse and damage.

**Quick & Easy to Install** - Caps attach directly to the ABS, PVC or cast Iron pipe.

**Condensation Draining** - Downward sloping cap design permits condensation to drain out of the cap.

### TECHNICAL DATA

Construction	
Base Metal:	1.6 mm Aluminum
Cap Metal:	2.0 mm Aluminum
Insect Screen:	Aluminum

Standard Sizes	
Nominal Pipe Sizes	Model No.
76.2 mm (3")	RVC3
101.6 mm (4")	RVC4

### INSTALLATION


1. Fit Cap directly over the top of the vent pipe and mark the location of the Cap screw holes on the pipe.
2. Remove the Cap. Drill a 9.52 mm (3/8") diameter hole through both walls of the pipe at the location of the screw marks.
3. Return the Cap to the top of the vent pipe, lining up the holes. Insert the screws through the Cap and the pipe.



### SPECIFICATION

Roof vent pipes are to be fitted with SURE-FLOW RETROFIT VANDALPROOF CAPS as manufactured by Lexsuo Corporation ([www.lexsucocorporation.com](http://www.lexsucocorporation.com), Tel: 800.268.2889, E-Mail: [info@lexsucocorp.com](mailto:info@lexsucocorp.com)).

Caps shall consist of a conical heavy gauge aluminum cover, complete with an aluminum insect screen. Install in strict accordance with the manufacturer's directions and flash in to the roof membrane membrane in accordance with [the roofing membrane manufacturer's; NRCA; CRCA] directions and good roofing practice.

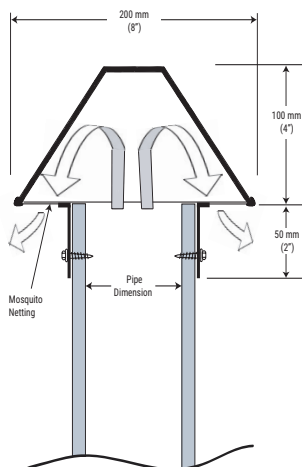

### WARRANTY

This product's lifetime warranty ensures it remains free from manufacturing defects and will perform its intended function throughout the entire lifespan of the roofing system.



### COMMERCIAL BUILDING PRODUCTS

Ontario & Western Canada 1.800.268.2889 / Quebec & Atlantic 1.800.363.2307

Distr. By/Par Lexsuo 2010 Corporation, 3275 Orlando Drive, Mississauga, ON, L4V 1C5