

LEXGRIP

14 PRE-ASSEMBLED HEAVY-DUTY SCREW
WITH 2" BARBED PLATE

DESCRIPTION & USE

LEXGRIP # 14 PRE-ASSEMBLED HEAVY DUTY SCREW WITH 2" BARBED PLATE is fast to install and used to fasten SBS base sheets at the laps.

TECHNICAL DATA

# 14 Pre-Assembled Heavy Duty Screw with 2" Barbed Plate	
Screw Length	Piece per Carton
50.8 mm (2"):	500
76.2 mm (3"):	250
101.6 mm (4"):	250
127 mm (5"):	250
152.4 mm (6"):	250
177.8 mm (7"):	250
203.2 mm (8"):	250

APPROVALS & COMPLIANCES




Note: This product is eligible within various CSA 123 Compositions.

INSTALLATION

Allow a minimum of 19 mm (3/4") penetration through the underside of steel decks and a minimum of 25.4 mm (1") embedment in wood plank. Pre-drilling required for concrete using a 4.42 mm (3/16") drill bit; pre-drilled hole must be at least 12.7 mm (1/2") deeper than the length of the fastener to allow for debris in the hole.

Using a screw gun, drive the screw until a slight depression is seen around the plate. The fastener must be tight enough so that the plate does not turn.

For the best results, use a variable speed 0 - 2500 rpm screw gun. Special stand-up installation tools are available to help speed up production and relieve physical stress.

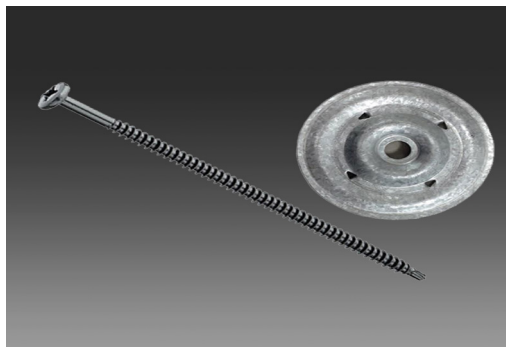

SPECIFICATION

Lap Seam Fastening (Generic) - Heavy Duty screws shall be Factory Mutual approved # 14 self-tapping screws with a # 3 Phillips Truss Head [pre-assembled; complete with] 51 mm (2") Barbed Galvanized Steel Seam Plates. Screws shall be coated with a corrosion resistant coating that passes 30 cycles of the Kesternich test.

Accepted Product: LEXGRIP # 14 PRE-ASSEMBLED HEAVY DUTY SCREW WITH 2" BARBED PLATE by LEXCOR (www.lexsucorporation.com, Tel: 1.800.268.2889). Install in accordance with manufacturer's directions.



COMMERCIAL BUILDING PRODUCTS

Ontario & Western Canada 1.800.268.2889 / Quebec & Atlantic Canada 1.800.363.2307

Distr. By/Par Lexsuo 2010 Corporation, 3275 Orlando Drive, Mississauga, ON, L4V 1C5

18062024