




Direction of Steel Deck Flutes

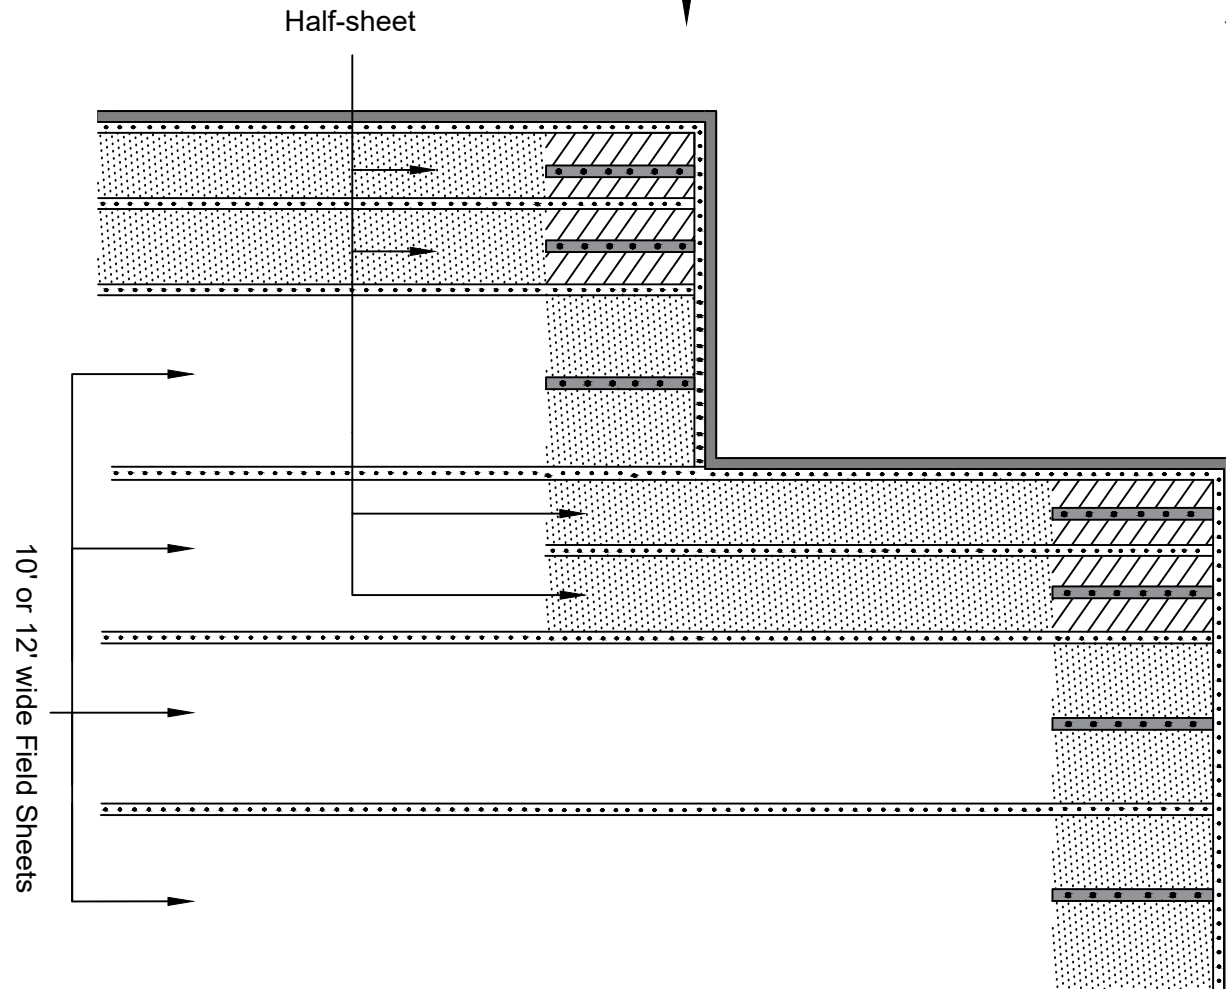

FM defined Perimeter Area*

FM defined Corner Area

* : The lesser of 0.1 times the building's lesser plan dimension or 0.4 times the eave height, subject to a minimum width of 4' (1.2m).

Higher buildings will require more than two half sheets.

Fastening under Reinforced Strip** or P.S. Coverstrip*** or 13" Hi-Tuff TPO Stripbond II****

** : Heat welded on all sides

*** : Applied with Primer

**** : Mechanically attached under field membrane. Applied with primer.

Third option = Cut the sheets to size and attachments in the seam.



FM Fastening - 10' or 12' Hi-Tuff Fields Sheets - Alternative #2

ROOFING SYSTEMS DETAIL

Scale:

Date: 22/12/2023

Detail no.: H-E-016