

DESCRIPTION & USE

LEXCAN HI-PRO PVC UN-REINFORCED MEMBRANE is a thermoplastic Poly Vinyl Chloride based membrane with Elvaloy®* KEE, for flashing details when the use of factory pre-molded flashings are not feasible.

LEXCAN HI-PRO PVC UN-REINFORCED MEMBRANE is used:

- To create a watertight seal at all roofing penetrations and irregular roof details.
- To reinforce "T" intersections in field seams and seam transitions from horizontal to vertical.

FEATURES & BENEFITS

Reliable Weldability - allows for consistent and high-quality seams in penetrations and other areas of the roof that are critical.

TECHNICAL DATA

Typical Properties & Characteristics	
Material:	Non-reinforced PVC with Elvaloy®** KEE
Thickness:	1.91 mm (0.075")
Available Colour:	White/Grey


* Elvaloy® KEE is a registered trademark of Dow.

PACKAGING & COVERAGE

Roll Size:	91.44 cm x 15.24 m (36" x 50')
Coverage per Roll:	13.94 m ² (150 ft ²)
Weight per Roll:	34 kg (75 lbs)
Quantity per Box:	1 per box

STORAGE

Store indoors, out of direct sunlight, and keep clean and dry prior to application.

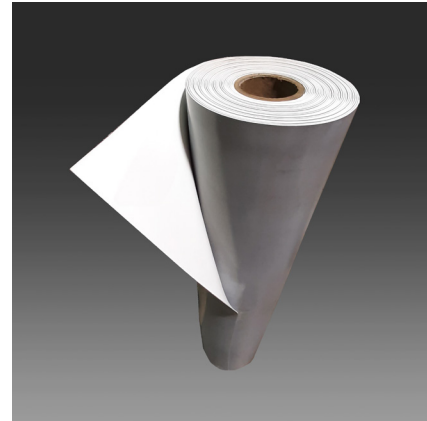

INSTALLATION

Note: Prior to installation, ensure the welding surface is clean and dry. If required, use LEXCAN SINGLE PLY MEMBRANE CLEANER.

LEXCAN HI-PRO PVC UN-REINFORCED MEMBRANE is used to flash various roofing penetrations. The specific method for flashing the detail is different for each situation. Consult the appropriate LEXCAN detail for installation.

CAUTIONS & LIMITATIONS

- Do not install LEXCAN HI-PRO PVC UN-REINFORCED MEMBRANE in direct contact with asphalt.