

DESCRIPTION & USE

LEXCAN HI-PRO PVC OVERLAY STRIP is a reinforced PVC (Poly Vinyl Chloride) based membrane with Elvaloy®* KEE, used for overlaying rows of fasteners and plates or stripping in HI-PRO PVC Roof Metal edging.


TECHNICAL DATA

Typical Properties & Characteristics	
Material:	Reinforced PVC with Elvaloy®* KEE
Thickness:	1.5 mm (60-mil)
Available Colours:	White/Grey and White/Tan

* Elvaloy® KEE is a registered trademark of Dow.

PACKAGING & COVERAGE

Roll Size:	20.32 cm x 45.72 m (8" x 150')
Coverage per Roll:	9.29 m ² (100 ft ²)
Weight per Roll:	18.1 kg (40 lbs)
Quantity per Box:	1 per box

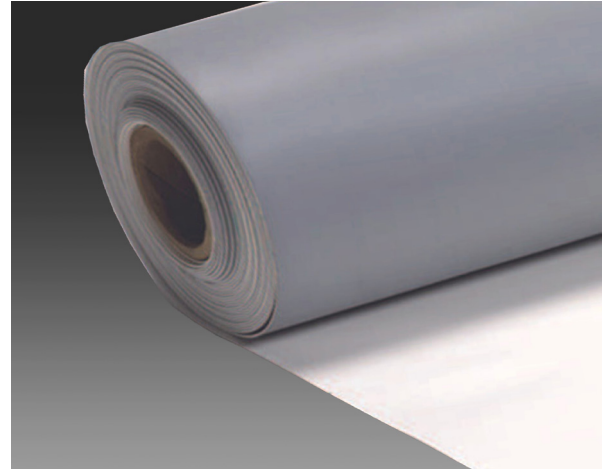

STORAGE

Store indoors, out of direct sunlight, and keep clean and dry prior to application.

INSTALLATION

Note: Prior to installation, ensure the existing welding surface, membrane or metal, is clean and dry. If required, use LEXCAN SINGLE PLY MEMBRANE CLEANER.

1. Using an auto welder or handheld hot-air welder, weld overlay strip in place.
2. Use the edge of a handheld silicone roller to crease the flashing into any membrane step-off for a proper seal.

CAUTIONS & LIMITATIONS

- Do not install LEXCAN HI-PRO PVC OVERLAY STRIP in direct contact with asphalt or coal tar pitch.